

URBAN 2.0 SERIES

Ideal for creating refreshed spaces, **URBAN 2.0** exudes a welcoming feel. The accents of warm neutral tones combined with a natural matt finish, allows designers to focus on cohesive and simple layouts that intrigue. Suitable for wall and floor application.



PRODUCT TYPE: Glazed porcelain

COLOURS: Warm White, Light Grey, Cotto, Kiwi, Sky, Sand, Almond, Concrete and Basalt

SIZES: 300x300mm
300x600mm
600x1200mm
Rectified Edges

FINISHES/USAGE:

Matt/Wall and Floor


AESTHETIC QUALITIES:

Uniformed and cement-like range

TECHNICAL DATA:

P4 Pendulum slip rating
More technical data on the last page


VARIATION:



V1


URBAN 2.0 SERIES

PRODUCT INFORMATION

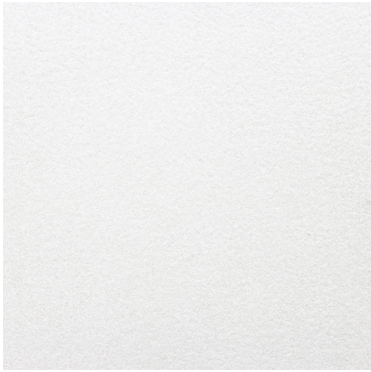

Warm White

Matt 300x300mm | 300x600mm
600x1200mm

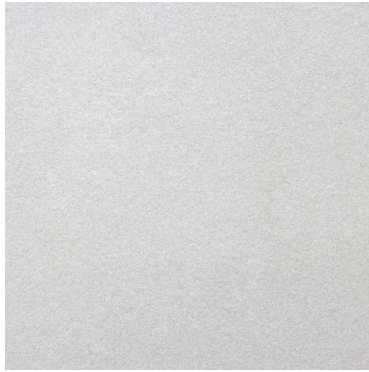


Light Grey

Matt 300x300mm | 300x600mm
600x1200mm



Cotto

Matt 300x300mm | 300x600mm

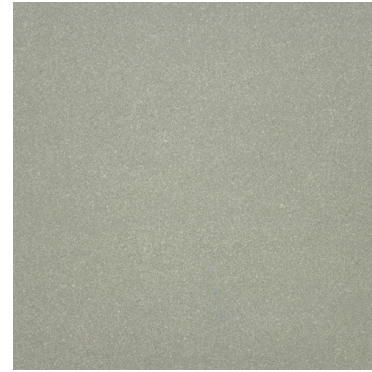


Kiwi

Matt 300x300mm | 300x600mm



Sky

Matt 300x300mm | 300x600mm

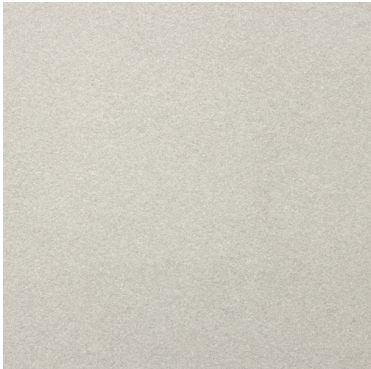

Sand

Matt 300x300mm | 300x600mm
600x1200mm



Almond

Matt 300x300mm | 300x600mm




Concrete

Matt 300x300mm | 300x600mm



Basalt*

Matt 300x300mm | 300x600mm

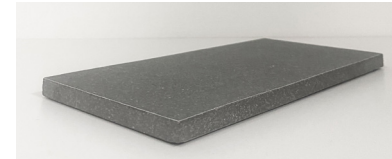








*Urban 2.0 Basalt is full bodied

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

URBAN 2.0 SERIES

TECHNICAL DATA

	technical characteristics	test method	result
	water absorption	ISO 10545-3	0.21%
	breaking strength	ISO 10545-4	≥ 1785N
	frost resistance	ISO 10545-12	Guaranteed
	bending strength	ISO 10545-4	≥ 33.5MPa
	abrasion resistance	ISO 10545-7	Class 3
	chemical resistance	ISO 10545-13	GLA/GA
	resistance to staining	ISO 10545-14	class 5

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.