

ARLO SERIES

Inspired by the natural tundra stone, **ARLO** features four beautiful colours with gentle organic veining. It is available in a variety of versatile sizes and is suitable for both commercial and residential use.



PRODUCT TYPE: Colour-bodied porcelain

COLOURS: Ice, Marfil, Warm Grey and Greige


SIZES: 75x75mm, 200x1200mm, 300x300mm, 300x600mm, 600x600mm and 600x1200mm
Rectified Edges

FINISHES/USAGE: Matt and Grip/Wall and Floor

AESTHETIC QUALITIES: Tundra inspired look

TECHNICAL DATA: P3 Pendulum Slip rating (Matt)
P4 Pendulum Slip rating (Grip)
More technical data on last page

VARIATION:



V2

ARLO SERIES

PRODUCT INFORMATION




Ice

Matt 75x75mm | 200x1200mm | 300x300mm | 300x600mm
600x600mm | 600x1200mm
Grip 300x600mm



Marfil

Matt 75x75mm | 300x300mm | 300x600mm | 600x600mm
Grip 300x600mm

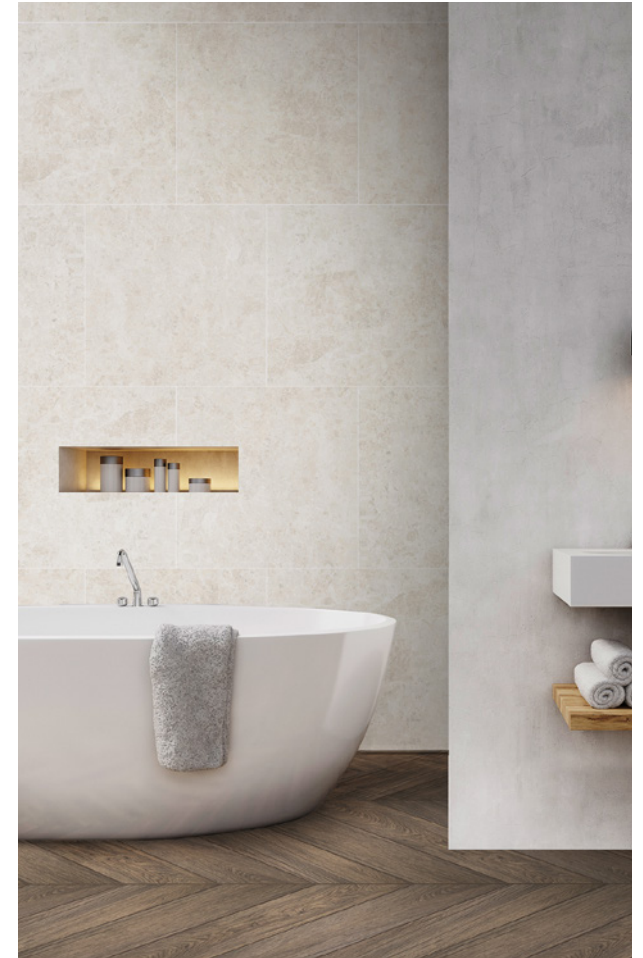

ARLO SERIES

PRODUCT INFORMATION



Warm Grey

Matt 75x75mm | 200x1200mm | 300x300mm | 300x600mm
600x600mm | 600x1200mm

Grip 300x600mm



Greige

Matt 75x75mm | 300x300mm | 300x600mm | 600x600mm
600x600mm | 600x1200mm

Grip 300x600mm



ARLO SERIES

ICE VARIATION



ARLO SERIES


MARFIL VARIATION



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ARLO SERIES


WARM GREY VARIATION

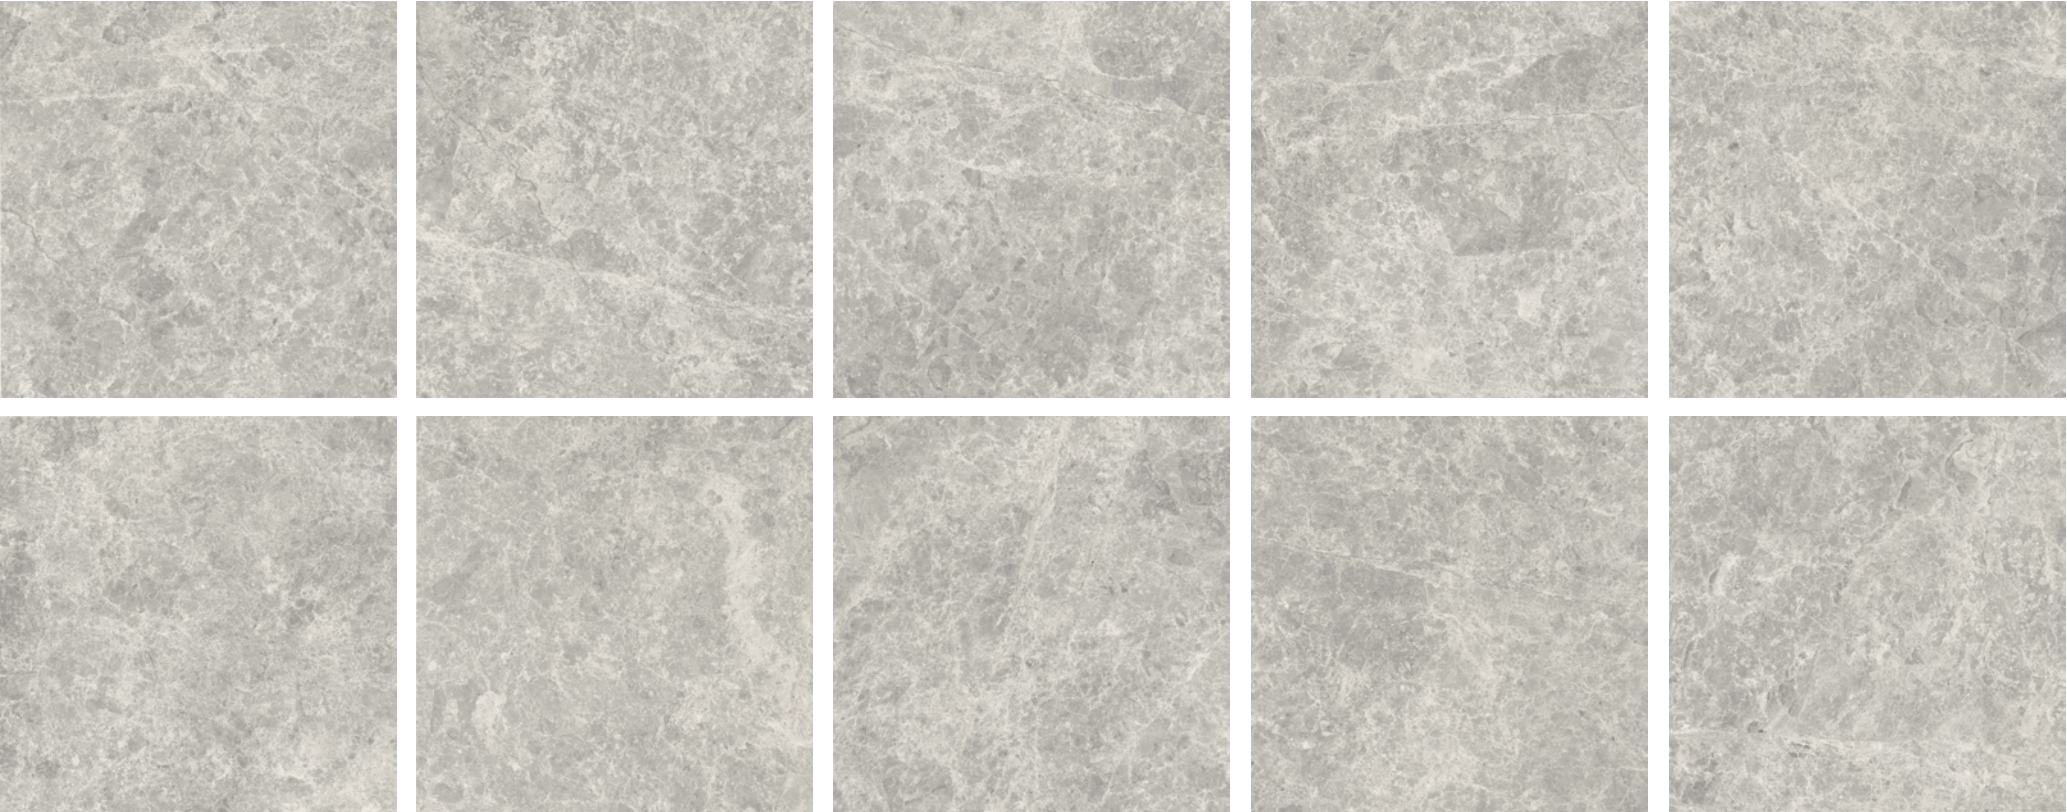

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ARLO SERIES



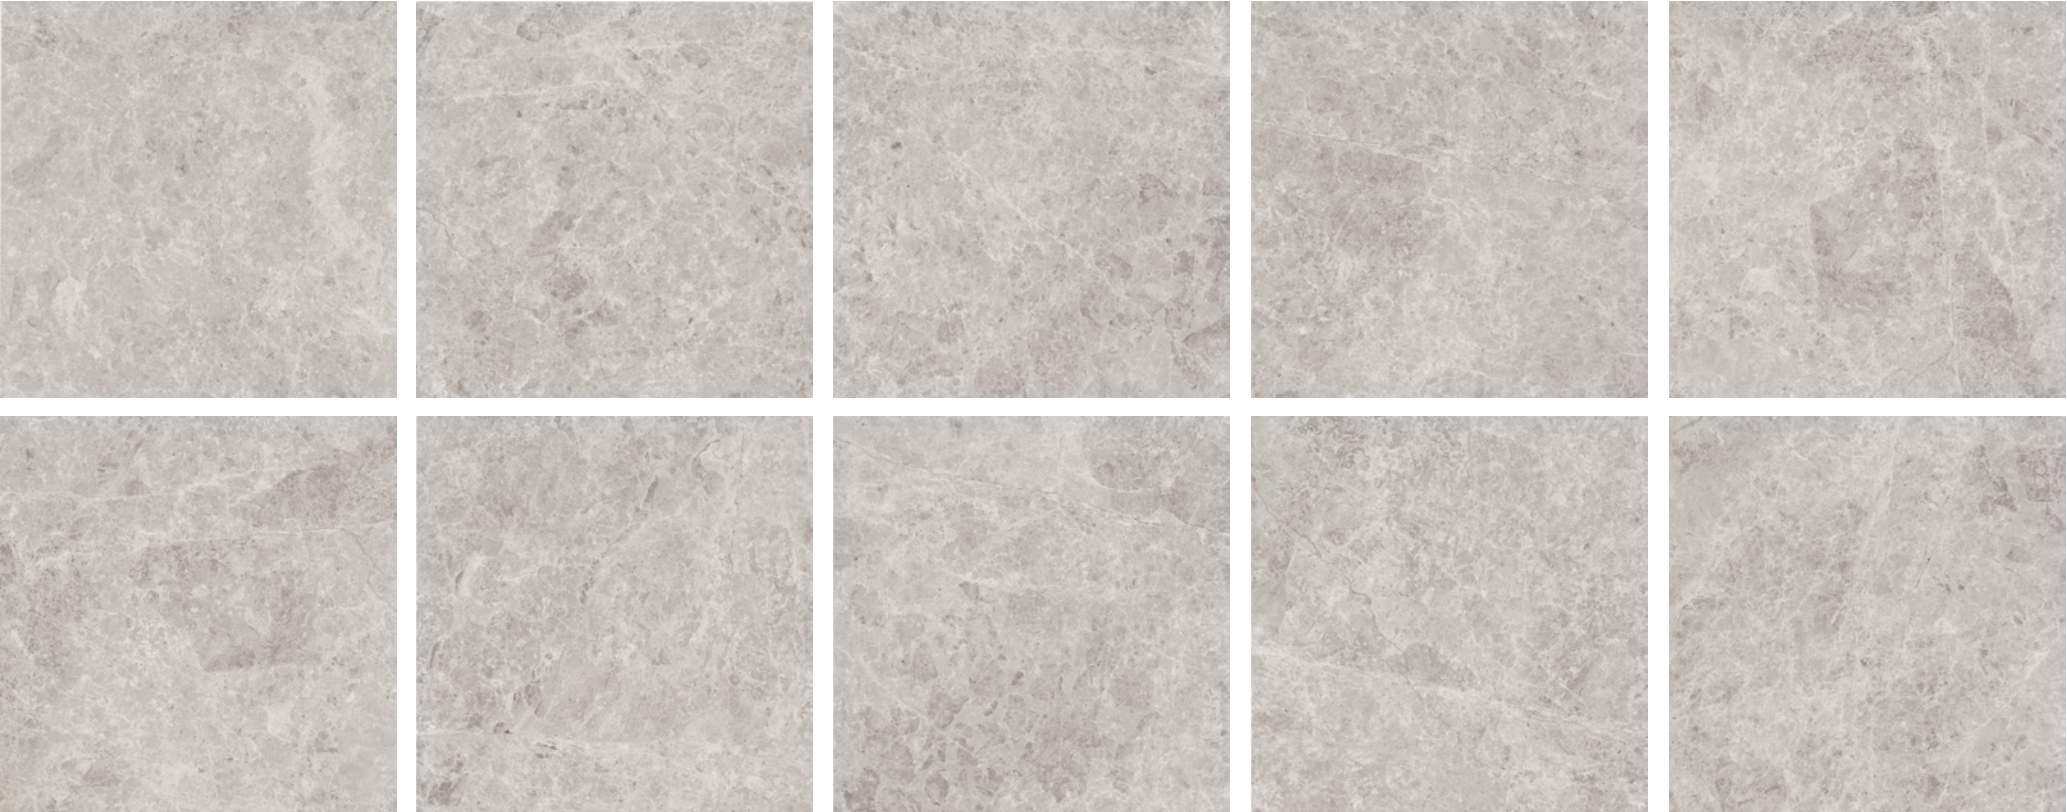



GREIGE VARIATION



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ARLO SERIES

TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	$\leq 0.5\%$	$\leq 0.21\%$
	breaking strength	ISO 10545-4	$\geq 1300N$	$\geq 1785N$
	shock resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass