
Inspired by Ceppo di Gre,
NORROCK features the
beautiful multi-colours of
fragmented pebbles the
natural stone is known for.
Available in five colours and a
wide range of sizes including
a large 600x1200mm format.

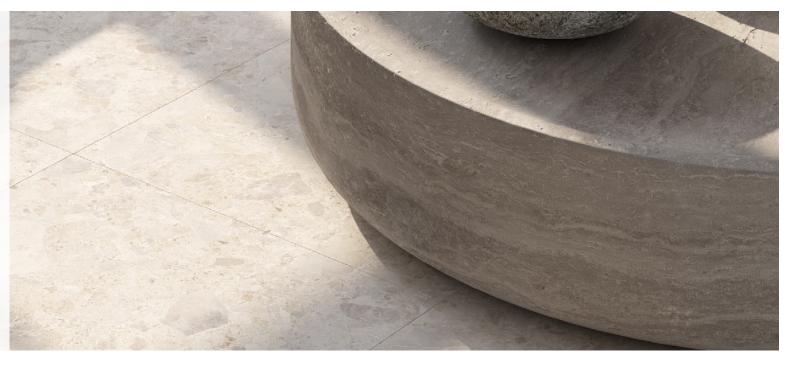

**PRODUCT TYPE:** Colour-bodied porcelain

COLOURS: Warm White, Ivory, Almond Beige

Grey and Charcoal

**SIZES:** 300x300mm, 300x600mm, 600x600mm

and 600x1200mm Rectified Edges FINISHES/USAGE: Matt and Grip/Wall and Floor

**AESTHETIC QUALITIES:** Ceppo Di Gre inspired look

**TECHNICAL DATA:** P3 Pendulum Slip rating (Matt) P5 Pendulum Slip rating (Grip)

P5 Pendulum Slip rating (Grip Paver) More technical data on last page

**CERTIFICATIONS:** 



VARIATION:



V2

### **PRODUCT INFORMATION**



#### Warm White

 Matt 300x300mm | 300x600mm | 600x600mm | 600x1200mm

 Grip 300x600mm

 Grip Paver 600x600x20mm



#### Ivory

 Matt
 300x300mm | 300x600mm | 600x600mm | 600x1200mm

 Grip
 300x600mm

 Grip Paver
 600x600x20mm



#### **PRODUCT INFORMATION**



#### Almond Beige

 Matt 300x300mm | 300x600mm | 600x600mm | 600x1200mm

 Grip
 300x600mm

 Grip Paver
 600x600x20mm




#### Grey

 Matt
 300x300mm | 300x600mm | 600x600mm | 600x1200mm

 Grip
 300x600mm

 Grip Paver
 600x600x20mm

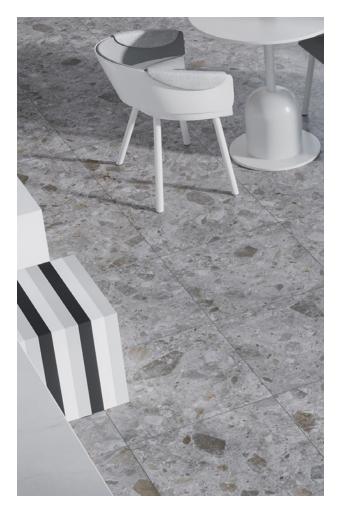

#### **PRODUCT INFORMATION**



#### Charcoal


Matt 300x300mm | 300x600mm | 600x600mm | 600x1200mm
Grip 300x600mm
Grip Paver 600x600x20mm




### WARM WHITE VARIATION




### **IVORY VARIATION**

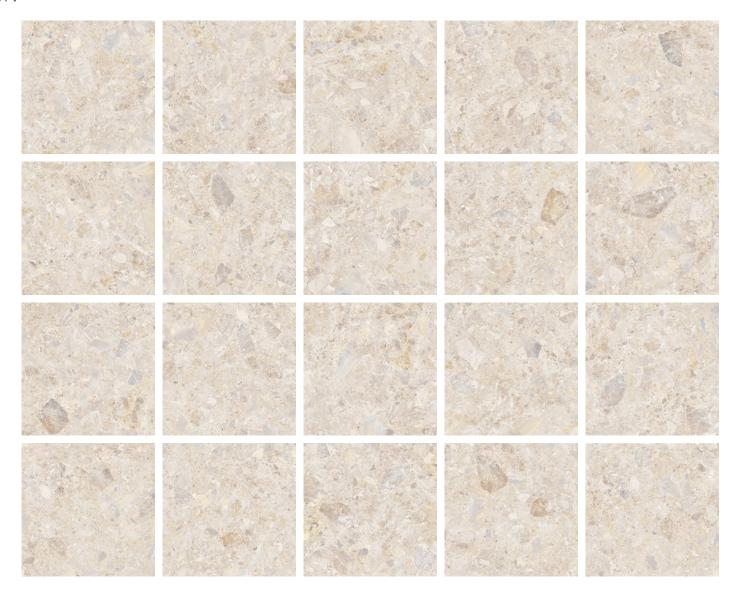


### **ALMOND BEIGE VARIATION**

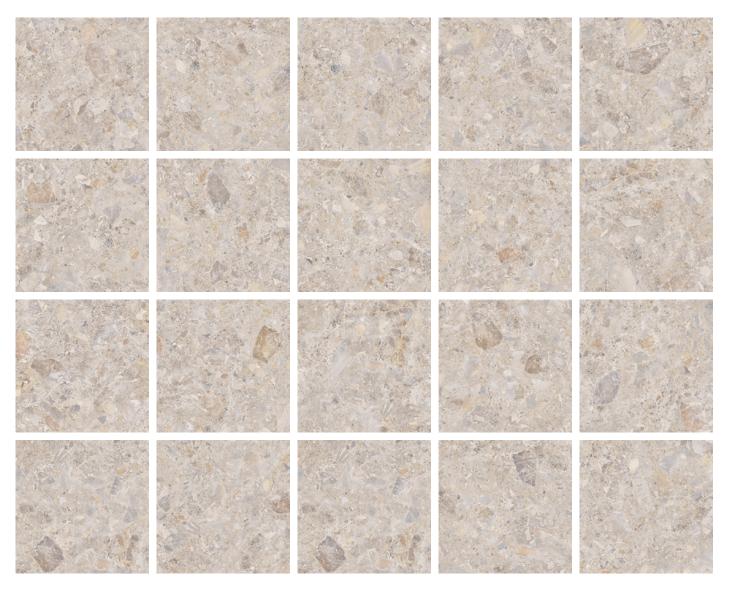

### **GREY VARIATION**

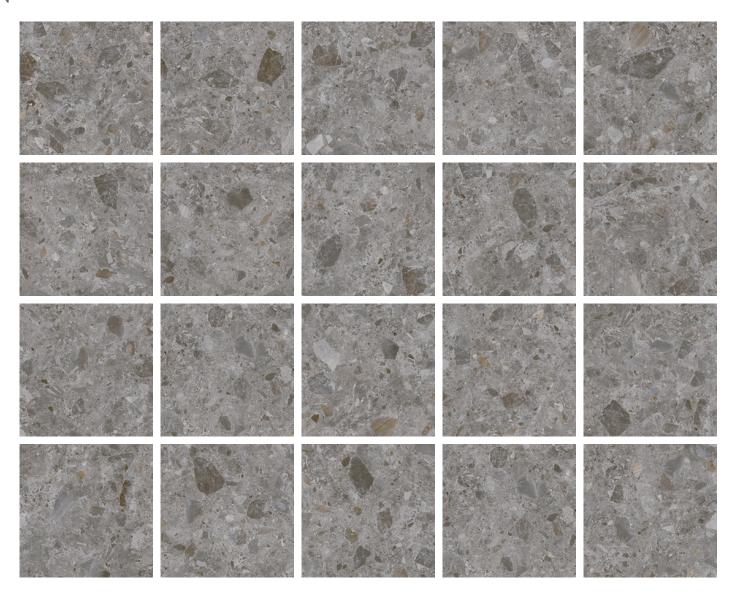

### **CHARCOAL VARIATION**

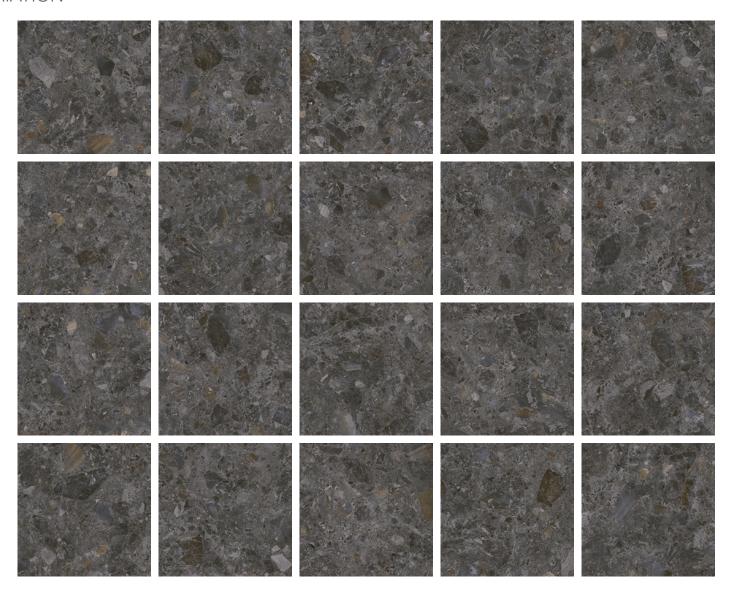

### **TECHNICAL DATA** - TILE

	technical characteristics	test method	required values	result
δ δ δ δ δ	water absorption	ISO 10545-3	≤0.5%	≤0.5%
5	breaking strength	ISO 10545-4	≥1300N	2265N
£03	shock resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass

#### **TECHNICAL DATA - PAVER**

	technical characteristics	test method	result
٥٥٥	water absorption	ISO 10545-3	≤0.5%
5	breaking strength	ISO 10545-4	8500N
EST	max warpage	ISO 10545-2	±2.0mm
5	max edge curvature	ISO 10545-2	±2.0mm
	chemical resistance	ISO 10545-13	Pass
	resistance to frost	ISO 10545-12	Pass
	staining resistance	ISO 10545-14	Pass

Porcelain Pavers and Coping tiles must be installed to Australian Standards (AS 3958.1, AS 3958.2 & AS 3727-2016) using correct procedures and products such as Mapei Ultralite S1.

No spot fixing under any circumstances.

## Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017" For more information please refer to: https://www.safework.nsw.gov.au

### **CERTIFICATIONS**



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. ISO 14001:2015 is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.