

SOFT STONE SERIES

SOFT STONE is produced using hi-definition inkjet technology to recreate a crosscut stone look. Available in three colours and both a matt and grip finish.



PRODUCT TYPE: Glazed porcelain

COLOURS: White, Ivory and Grey

SIZES: 300x300mm, 300x600mm, 600x600mm
and 600x1200mm
Rectified Edges


FINISHES/USAGE: Matt and Grip/Wall and Floor

AESTHETIC QUALITIES: Natural stone look

ORIGIN: N/A

TECHNICAL DATA: P3 Pendulum slip rating (Matt)
P4 Pendulum slip rating (Grip)
More technical data on the last page

VARIATION:



V2


SOFT STONE SERIES

PRODUCT INFORMATION




White

Matt 300x300mm | 300x600mm | 600x600mm
600x1200mm
Grip 300x600mm

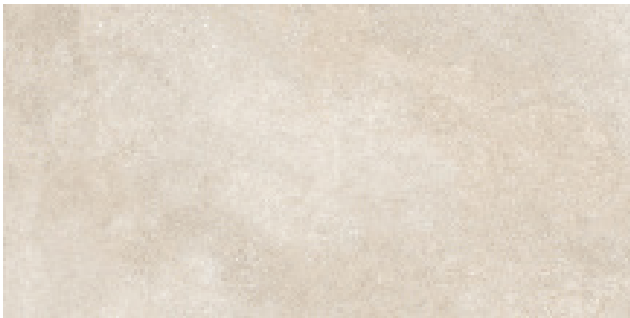

Ivory

Matt 300x300mm | 300x600mm | 600x600mm
600x1200mm
Grip 300x600mm

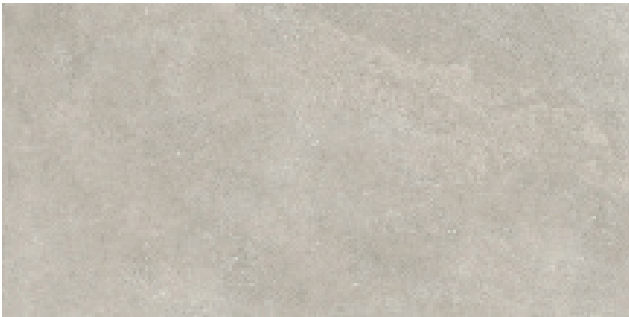

Grey

Matt 300x300mm | 300x600mm | 600x600mm
600x1200mm
Grip 300x600mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

SOFT STONE SERIES

WHITE VARIATION



600x1200mm | 12 faces

600x600mm | 24 faces

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

SOFT STONE SERIES

IVORY VARIATION



600x1200mm | 12 faces

600x600mm | 24 faces

SOFT STONE SERIES

GREY VARIATION











600x1200mm | 12 faces

600x600mm | 24 faces

SOFT STONE SERIES

TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.4%
	modulus of rupture	ISO 10545-4	≥ 35 N/mm2	compliant
	surface quality	ISO 10545-2	Complies with the standards	≥95%
	thermal shock resistance	ISO 10545-9	No sample must show visible defects	compliant
	deep abrasion resistance	ISO 10545-6	≤ 175 mm3	compliant
	chemical resistance	ISO 10545-13	Declared value	compliant
	resistance to frost	ISO 10545-12	Resistant	compliant
	staining resistance	ISO 10545-14	Minimum Class 3	compliant