
Durable and monochrome. our **ARCHITECTURAL GRANITO** Series is a popular choice for large scale industry and commercial developments. An easy maintenance tile with P4 slip resistant properties, Granito boasts a sleek design that can be mixed and matched to enhance modern aesthetics.

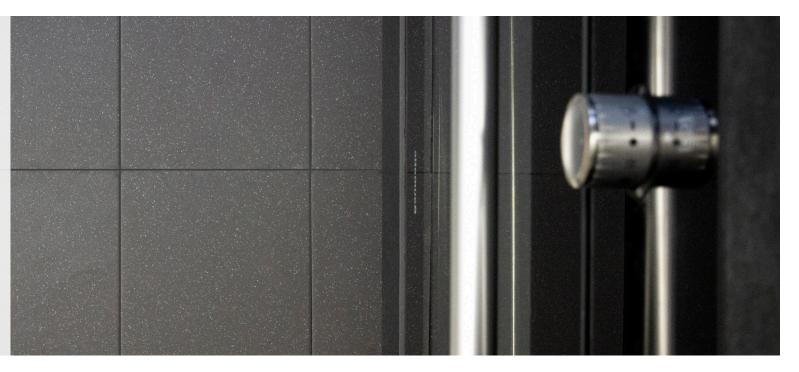

Unglazed porcelain PRODUCT TYPE:

Silver, Grey, Light Grey, Dark Grey, Antrasit, COLOURS:

Charcoal and Absolute Black

SIZES:

100x100mm, 100x200mm Cove, 200x200mm, 300x300mm

Non-Rectified Edges

Arkitek Series Rectified Edges

FINISHES/USAGE: Matt, Mercato & Diamond/ Wall & Floor*

AESTHETIC QUALITIES: Commercial use tiles

ORIGIN: N/A

P3 Pendulum Slip rating (Absolute Black) TECHNICAL DATA:


P4 Pendulum Slip rating (Matt/Mercato) P5 Pendulum slip rating (Diamond) More technical data on last page


*Diamond finish is floor only

VARIATION:



PRODUCT INFORMATION

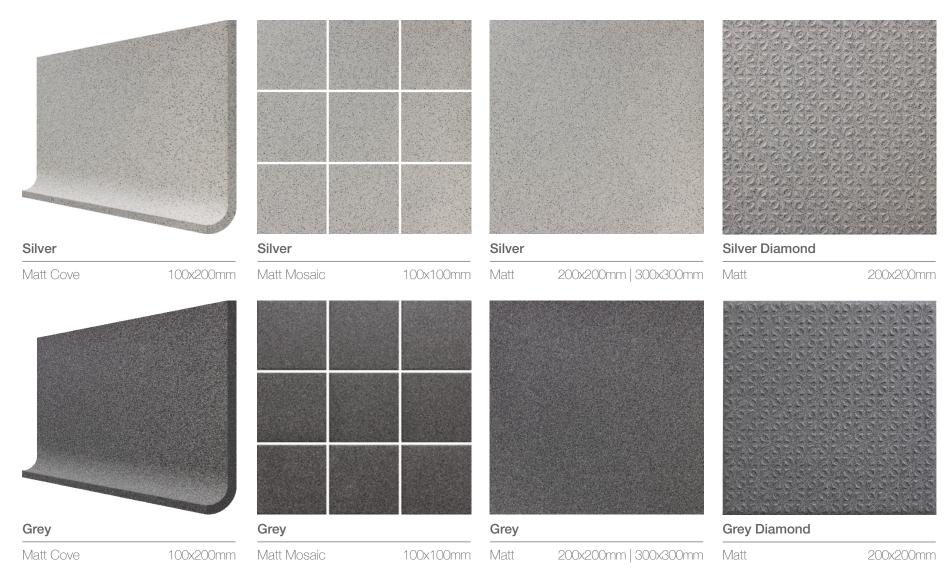

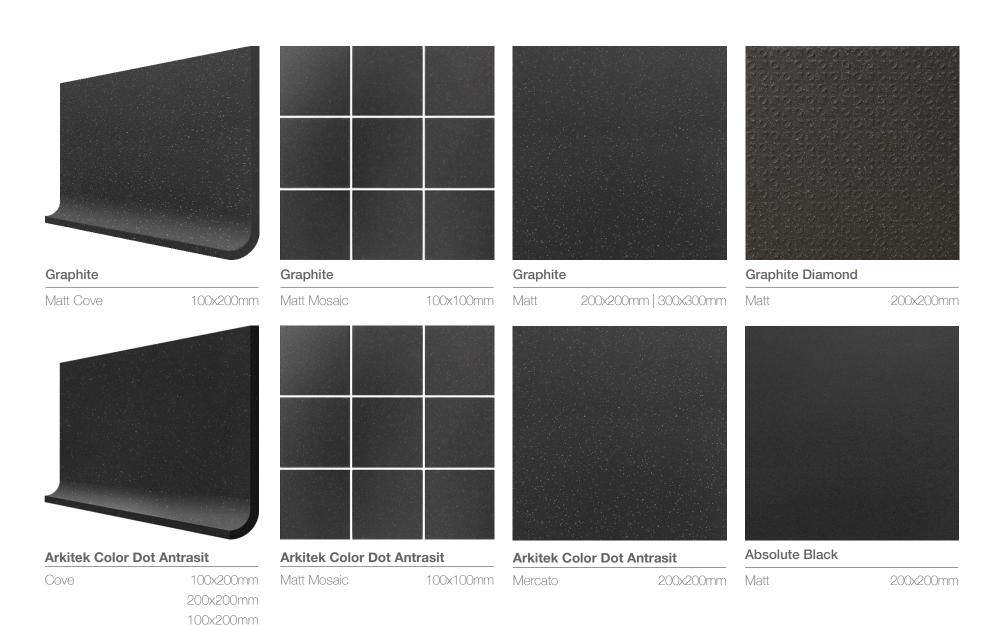



Arkitek Dotti Light Grey

Matt Mosaic 100x200mm



Arkitek Dotti Dark Grey

Mercato 200x200mm



Arkitek Dotti Light Grey

Mercato 200x200mm



Arkitek Dotti Dark Grey Diamond

Diamond 200x200mm



GRANITO SERIES

TECHNICAL DATA

| | technical characteristics Group B I a | test method | required values | value |
|--------------|--|--------------|---|----------|
| δ δ δ δ δ | water absorption | iso 10545-3 | ≤ 0.5% | 0.21% |
| B C | bending strength | iso 10545-4 | ≥12MPA | ≥33.5MPA |
| B C | breaking strength (S) | iso 10545-4 | ≥ 350 N | ≥ 1785N |
| | abrasion resistace | iso 10545-7 | Max. 175 mm³ PEI 1-5 | Class 3 |
| | chemical resistance | iso 10545-13 | Household chemicals and swimming pool salts | GA |
| • | | | Low concentration of acids and alkalis | GLA |
| 22 | stain resistance | iso 10545-14 | Minimum Class 3 | Class 5 |